

LF Receiver Antenna CAS143



Description

- Compact LF receiver antenna (3D).
- Covered by over-molding
- High Sensitivity and Reliability.
- L × W × H: 15.0 × 13.7 × 4.0 mm Max.
- Product weight: 1.86g Ref..
- RoHS compliance.

Environmental Data


- Operating temperature range: -40°C~+85°C
- Storage temperature range: -40°C~+100°C

Packaging


- Carrier Tape and Reel.
- Tape specification according to EIA481.
- 500pcs/reel.

Applications



- PEPS, Smart key system.
- Security system

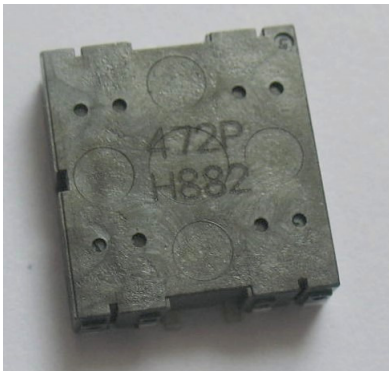


Dimension - [mm]

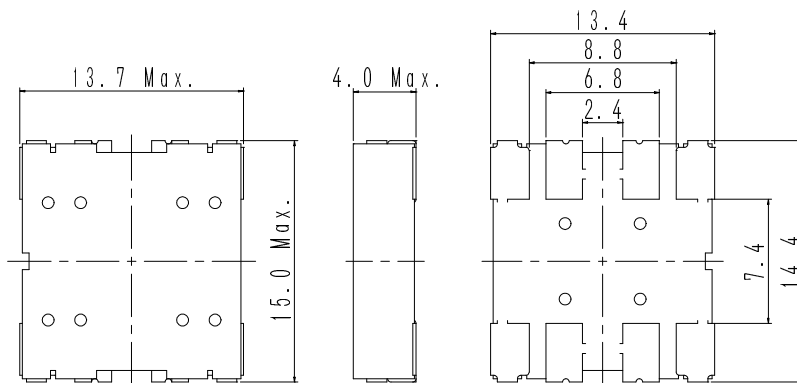

Schematic diagram (2 kinds)

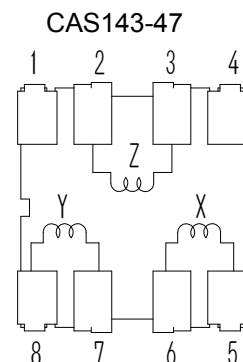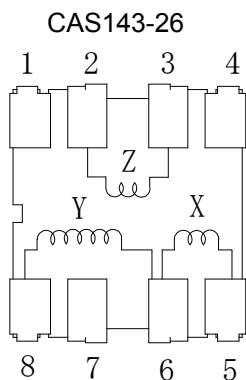

LF Receiver Antenna CAS143

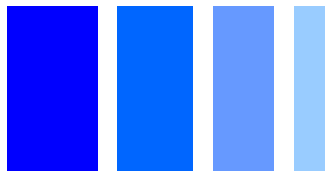

Electrical Characteristics

Part number	Item	5-6 (X-axis)	8-6 (Y-axis)	2-3 (Z-axis)	Measuring condition
CAS143-26	Inductance	2.66mH \pm 5%	2.66mH \pm 5%	3.8mH \pm 5%	134.2kHz, 1Vac
	Unloaded Q	44 (typ.)	41 (typ.)	45 (typ.)	134.2kHz, 1Vac
	S.R.F	1000kHz (typ.)	800kHz (typ.)	600kHz (typ.)	
CAS143-47	Item	5-6 (X-axis)	7-8 (Y-axis)	2-3 (Z-axis)	
	Inductance	4.7mH \pm 5%	4.7mH \pm 5%	7.2mH \pm 5%	125kHz, 1Vac
	Unloaded Q	47 (typ.)	45 (typ.)	50 (typ.)	125kHz, 1Vac
	S.R.F	800kHz (typ.)	800kHz (typ.)	500kHz (typ.)	

* It is possible for different inductance value.